





NOTES:
MATERIAL:

- 1 HSG - LCP 6130 , UL94V-0
- 2 CONTACT - C5210R-EH,Gold plated 15u* min over 50u* min Nickel underplated.
- 3 METAL TAB - SUS301,T=0.2mm, Ni: 20u".
- 4 P/N: MCNT2130D0XX-X

0 : SMT R/A TYPE
1 : SMT STRAIGHT TYPE

PIN TYPE:
10 : 10 PIN
16 : 16 PIN
26 : 26 PIN
32 : 32 PIN
40 : 40 PIN

	10 PIN	16 PIN	26 PIN	32 PIN	40 PIN
A	14.20	19.00	27.00	31.80	38.20
B	7.20	12.00	20.00	24.80	31.20
C	17.20	22.00	30.0	34.80	41.20
D	19.20	24.00	32.00	36.80	43.20
E	9.20	14.00	22.00	26.80	33.20
F	5.60	10.40	18.40	23.20	29.60

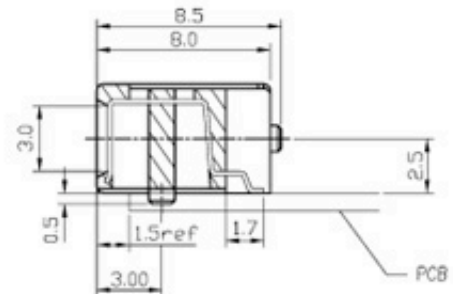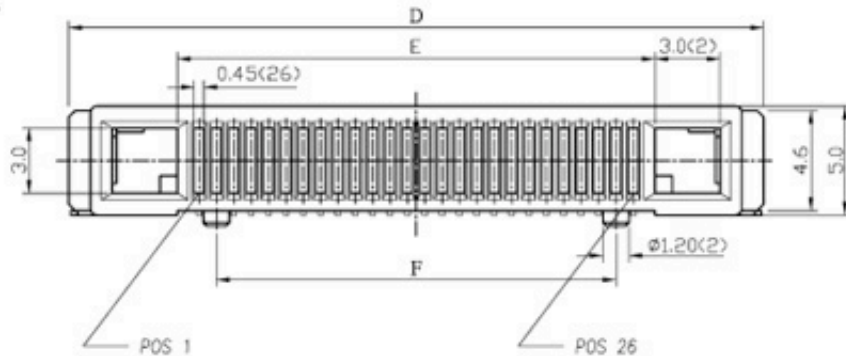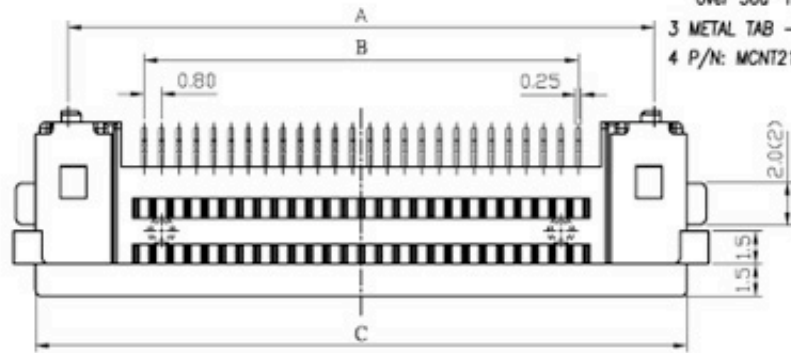

CAD NO. MCNT2130D0XX-0CTYPE_2

STAMP PART NO. IN AREA INDICATED BY "X"	MTL:
UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL / OVER TOLERANCES	HEAT TREAT COAT.G OR PLAT.G
INCH TOLERANCES METRIC	REQ'D:
0.0 ±0.01	D.R. 陳德宏 04/08/02
0.00 ±0.005	CHK
0.000 ±0.002	APVD
0.0000 ±0.0005	
0.0 ±0.05	
0.007 ±0.02	

CYPRESS INDUSTRIES
www.cypressindustries.com

TITLE PDA VIEWER CONN SMT R/A TYPE				PRODUCT NO. OR LAYOUT
SCALE 5:1	SIZE A3	NO. MCNT2130D0XX-0	DET. NO. C	REV. 2
				SHT. NO. 1 OF 1

REV.	DESCRIPTION	DATE